

# 01 QUICK CONNECT COUPLINGS RACCORDS RAPIDES

STORZ



AGRICULTURE



BULK MATERIALS  
HANDLING



GENERAL  
INDUSTRY


## STANDARDS NORME

DIN 14321/14322/14323, 14307/14308/14309, 14311/14312/14313.

## SIZE DIMENSIONS

From DN 25 to DN 100 mm. Du diamètre 25 au 100 mm.

DN	Ø B
25-D	31
52-C	66
75-B	89
110-A	133

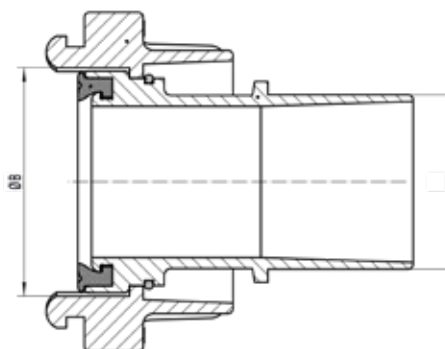

## WORKING PRESSURE PRESSION DE SERVICE

16 bar

## TEMPERATURE TEMPÉRATURE

-20 °C/+65 °C

## COUPLING MATERIALS MATIÈRE DES RACCORDS

- **AL** Aluminium Aluminium
- **SS** Stainless steel Inox

## GASKETS JOINTS

Materials Matières

NBR

## THREAD FILETAGE

BSPP following EN ISO 228-1.


BSPP suivant EN ISO 228-1.



**01** QUICK  
CONNECT COUPLINGS  
RACCORDS RAPIDES

**STORZ**

**CONNECTION PRINCIPLE** PRINCIPE DE RACCORDEMENT

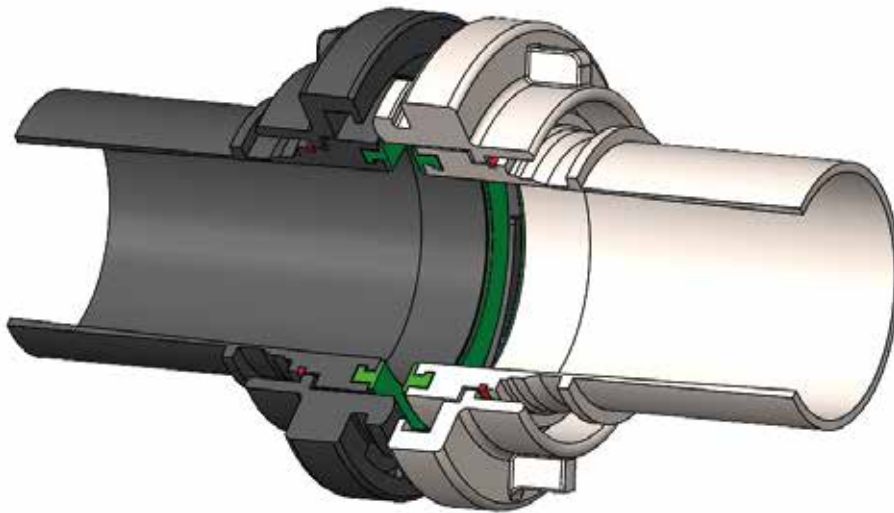

## STORZ STORZ

### SMOOTH HOSE SHANK WITH COLLAR DOUILLE LISSE À COLLERETTE



	DN coupl. Diam. raccord	DN shank Diam. douille	AL NBR gasket Joint NBR
<b>Type C</b>	52	50	5105098
<b>Type B</b>	75	75	5105099
<b>Type A</b>	110	75	5107330
<b>Type A</b>	110	100	5105100

### GROOVED HOSE SHANK DOUILLE A GORGE



	DN coupl. Diam. raccord	DN shank Diam. douille	AL NBR gasket Joint NBR
<b>Type C</b>	52	50	5107125
<b>Type B</b>	75	75	5101816
<b>Type A</b>	110	100	5108991



### FEMALE THREAD FILETÉ FEMELLE



	DN coupl. Diam. raccord	BSPP Thread Filetage	AL NBR gasket Joint NBR
<b>Type C</b>	52	2"	5101771
<b>Type B</b>	75	3"	5101772
<b>Type A</b>	110	4"	5101773

## STORZ STORZ



### SECURE FEMALE THREAD FILETÉ FEMELLE SÉCURISÉ



	DN coupl. Diam. raccord	BSPP Thread Filetage	AL NBR gasket Joint NBR
<b>Type C</b>	52	2"	5101537
<b>Type B</b>	75	3"	5101538
<b>Type A</b>	110	4"	5101539



### SWIVEL FEMALE THREAD FILETÉ FEMELLE TOURNANT



	DN coupl. Diam. raccord	BSPP Thread Filetage	AL NBR gasket Joint NBR	SS 316 NBR gasket Joint NBR
<b>Type C</b>	52	2"	5105096	5102242
<b>Type B</b>	75	3"	5105097	5101821
<b>Type A</b>	110	4"	5101774	5103819

### CAP BOUCHON



	DN coupl. Diam. raccord	AL NBR gasket Joint NBR
<b>Type C</b>	52	5105101
<b>Type B</b>	75	5101817
<b>Type A</b>	110	5105102